


ICS DRILL MOTOR/STAND

PRODUCT DATASHEET
Vortex-625-120V / X2R-ICS

Vortex-625-120V / X2R-ICS
ON STAND
AIR COOLED

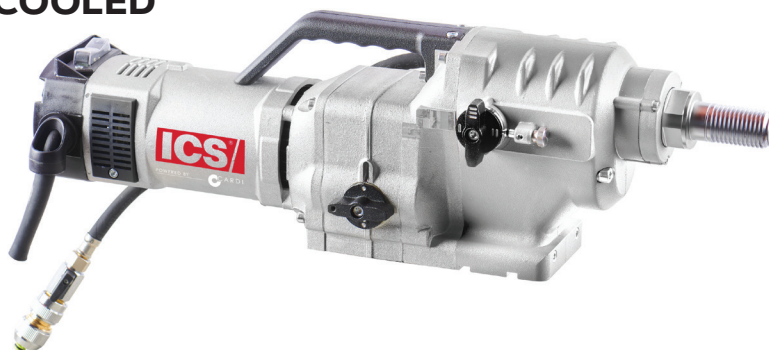

Specifications

ALSO FITS C 520-ICS STAND



Vortex-625-120V DRILL MOTOR	
Drilling Diameter	1" - 24" / 2.5 - 60 cm
Input Power (Max/Rated)	3350 / 2820 W
Input Current (Max/ Rated)	31 / 25 A
Operational Mode	On stand (rig)
Drilling Mode	Wet
MotorType	Electric 1P 115-120V - 50-60 Hz
Gears	6
Rated No-Load rpm	210 / 340 / 480 / 730 / 1200 / 1670 RPM
Rated Load rpm	135 / 220 / 315 / 480 / 780 / 1100 RPM
Core Bit Connection	1.25" UNC
Noise Emissions - Sound Pressure Level (LpA)	91 [dB (A)]
Noise Emissions - Sound Power Level (LWA)	104 [dB (A)]
Weight	31.4 lbs / 14.2 kg
Dimensions L x W x H	21.25" x 6.25" x 6.75" / 55 cm x 17 cm x 19 cm
X2R-ICS STAND	
Base	Professional High Resistance Aluminum Base
Column	Steel 2" x 2" / 5 cm x 5 cm
Carriage	Steel Rollers & Bearings
Feeding Handle	3 Spokes Feeding Handle
Max Carriage Run	25.5" / 65 cm
Rear Bars	Steel - 2 Bars
Tilting Angle	From 0° - 45°
Fixing System	With Anchor
Core Drill Mounting	Dove-Tail Quick Connection
Max Drilling Diameter	20" / 50 cm
Weight	56 lbs / 25.4 kg
Dimensions L x W x H	20.75" x 16" x 44" / 53 cm x 41 cm x 112 cm
Includes 19mm Spanner & 6 mm Allen Key	



Diamond Tools and Equipment

ICSDIAMONDTOOLS.COM | 800.321.1240

Effective January 1, 2025 | Copyright 2025 ICS, Oregon Tool Inc. Pricing, product offerings and specifications are subject to change without notice. FORCE3, FORCE4, PowerGrit, SpeedHook, SealPRO, and WallWalker are registered trademarks of ICS. The best way to cut concrete, DCT, Speed King, TSS, Trident and ProFORCE are trademarks of ICS. Rev: 012025.